




# Gebo Portlights

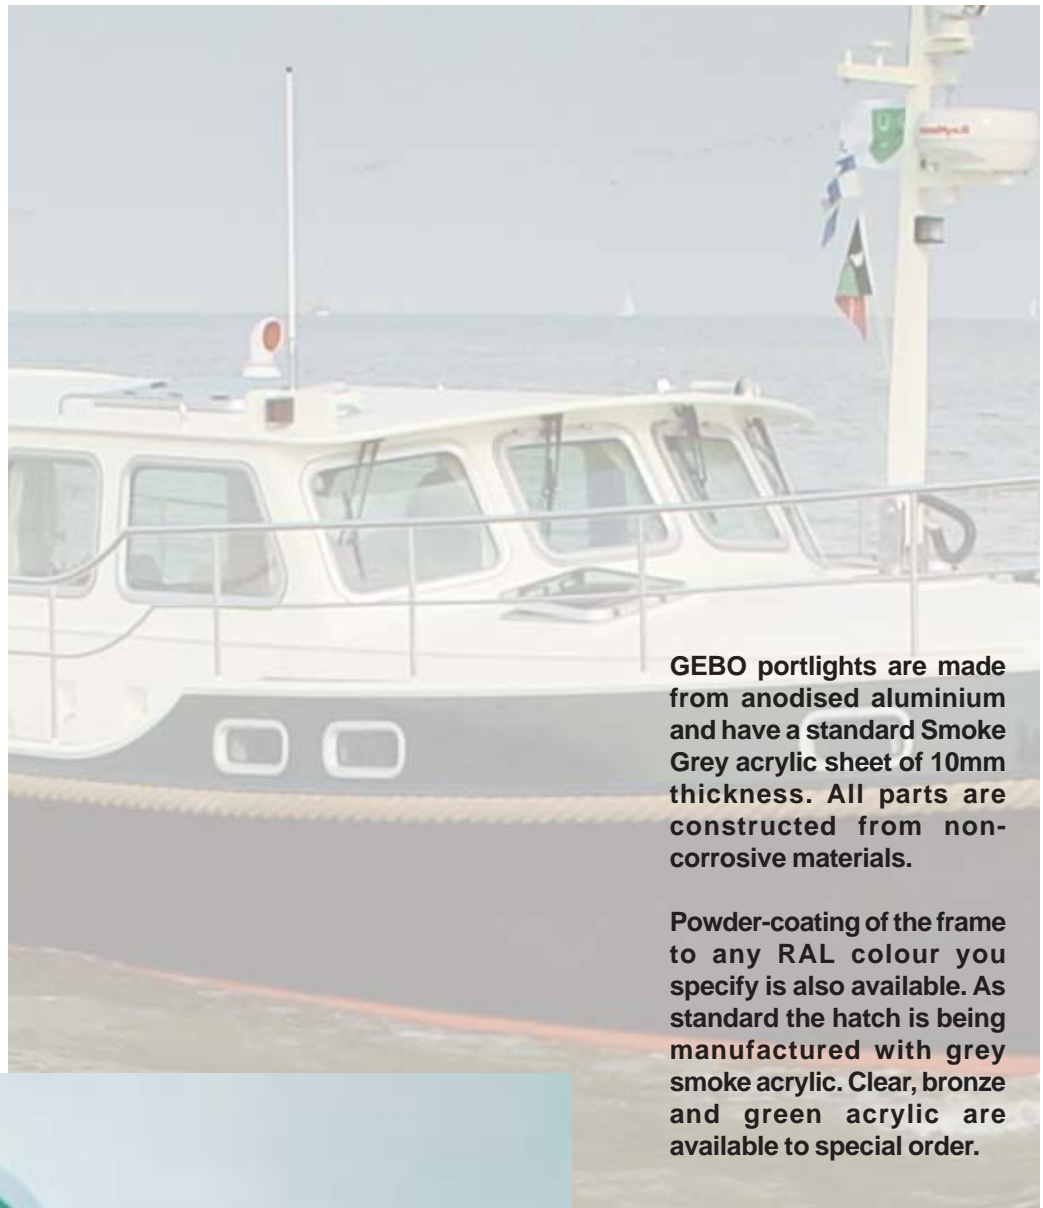

**GEBO portlights are made from anodised aluminium and have a standard Smoke Grey acrylic sheet of 10mm thickness. All parts are constructed from non-corrosive materials.**

**Powder-coating of the frame to any RAL colour you specify is also available. As standard the hatch is being manufactured with grey smoke acrylic. Clear, bronze and green acrylic are available to special order.**





# Gebo Portlights



## WATERTIGHT DESIGN



Unlike many designs, Gebo portlights are designed for watertight hull fitting, so there's no problem when a heeling yacht places the portlight against the pressure of fast-running water.

## FRICTION HINGE


The Gebo's friction hinge firmly fixes the portlight in any position without the need for stays.

## NON-DRIP DESIGN

The smooth angled outer frame prevents water from collecting on the frame and dripping into your cabin when the portlight is opened.

## EASY INSTALLATION... AND NO HOLE DRILLING

Each Gebo portlight is supplied with an aperture template to aid fitting. There are no holes to drill as the Gebo's unique clamp system provides a perfect fit. You simply apply sealant between portlight and hull, then screw the inner rim onto the back of the outer frame from the inside. Both rim and frame are pre-drilled. Gebo clamp system portlights are suitable for wall thickness of 4 to 23 mm.

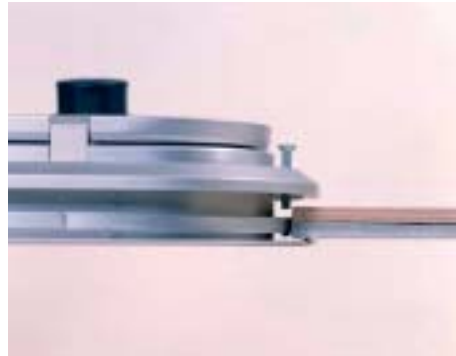

*The following pages will inform you about our Gebo portlights:*

- *Standard (rectangular) portlight, page 16 and 17.*
- *Circular ended portlights pages 18 and 19.*
- *Round and Elliptical portlights, page 20.*
- *Flushline portlights, page 21.*
- *Econoline portlights, page 22 and 23.*



# Portlights Rectangular



## Simple installation: no hole drilling

### COLOUR OF THE ACRYLIC

As standard the portlight is being manufactured with grey smoke acrylic. Clear, bronze and green acrylic are available to special order.

dripping into your cabin when the portlight is opened.

Optional quick-fit stainless steel mosquito screens can be supplied for most standard sizes.

no problem when a heeling yacht places the portlight against the pressure of fast-running water.

### NON-DRIP DESIGN

The smooth angled outer frame prevents water from collecting on the frame and

### WATERTIGHT DESIGN

Unlike many designs, Gebo portlights are designed for watertight hull fitting, so there's

### CATEGORY:

A + B + C + D


AREA I

See page 37

## Accessories



Portlight Rectangular



Mosquito screen



Rainshield





■ *Unique labour saving clamp fitting system.*




■ *Unique three-point hinge for easier opening.*



■ *Non-drip frame design.*


### Portlights - Rectangular

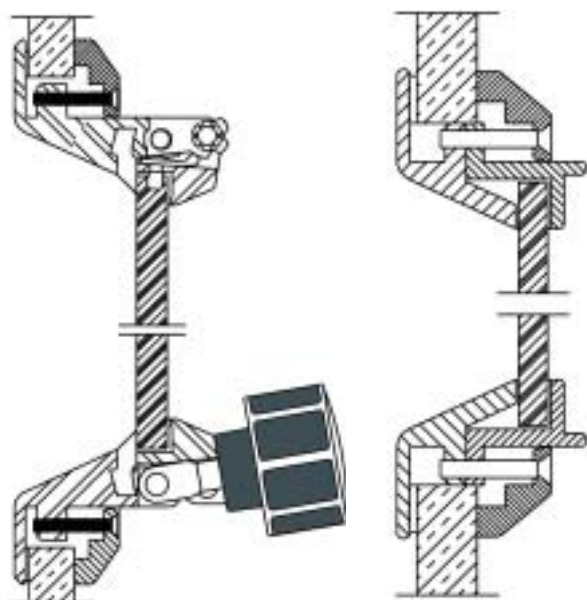


**Opening**

**Fixed**


### Portlights, rectangular - sizes




268x141mm



346x141mm



375x175mm



375x215mm



475x255mm



600x175mm

Portlights should be fitted to a flat surface with a maximum tolerance of 1mm.

### PORTLIGHTS RECTANGULAR - SPECIFICATIONS

Art.No.	Cut-Out size L x B	Radius	Overall size L x B	Radius	Glass - see through	Mosquito screen	Rainshield
81.00.10.00 Opening	268x141mm	56	293x166mm	68	203x76mm	84.75.00.01	
81.00.55.00 Opening	346x141mm	56	371x166mm	68	281x76mm	84.75.00.02	
81.00.20.00 Opening	375x175mm	56	400x200mm	68	310x110mm	84.75.00.03	84.85.00.03
81.00.29.00 Opening	375x175mm black	56	400x200mm	68	310x110mm	84.75.00.03	84.85.00.03
81.00.30.00 Opening	375x215mm	56	400x240mm	68	310x150mm	84.75.00.04	84.85.00.04
81.00.30.01 Opening	375x215mm black	56	400x240mm	68	310x150mm	84.75.00.04	84.85.00.04
81.00.40.00 Opening	475x255mm	56	500x280mm	68	410x190mm	84.75.00.05	84.85.00.05
81.00.85.00 Opening	600x175mm	56	625x200mm	68	535x110mm	84.75.00.06	84.85.00.06
81.10.11.00 Fixed	268x141mm	56	293x166mm	68	213x86mm		
81.10.55.00 Fixed	346x141mm	56	371x166mm	68	291x86mm		
81.10.21.00 Fixed	375x175mm	56	400x200mm	68	320x120mm		
81.10.21.01 Fixed	375x175mm black	56	400x200mm	68	320x120mm		
81.10.31.00 Fixed	375x215mm	56	400x240mm	68	320x160mm		
81.10.31.01 Fixed	375x215mm black	56	400x240mm	68	320x160mm		
81.10.41.00 Fixed	475x255mm	56	500x280mm	68	420x200mm		
81.10.86.00 Fixed	600x175mm	56	625x200mm	68	545x120mm		